


TF-L - COPPER TERMINAL FOR FLEXIBLE CONDUCTORS (ONE HOLE / LONG BARREL)

TF-300-L-17

Description

- Purpose:** Termination of copper conductors.
- Characteristics:** High electrical conductivity and corrosion resistance. Pad with several hole diameter options and optimum electrical contact. Expanded shape barrel for easy insertion of flexible conductors.
- Applications:** Electrical panels, circuit breaker connections, motors, machines, busbars, electrical distribution boards, among others.
- Material:** Electrolytic copper.
- Finish:** Tin Plated.

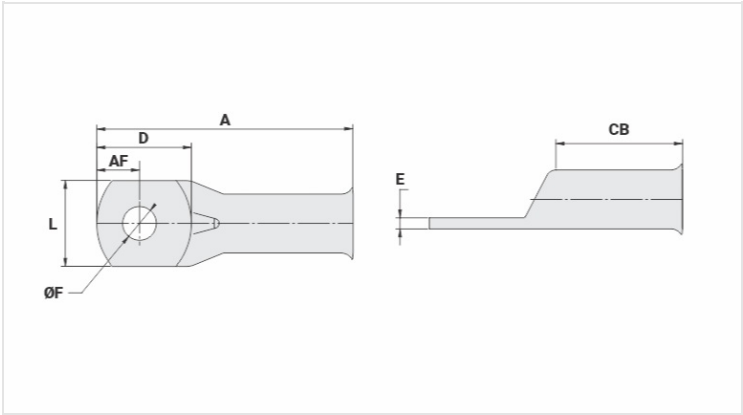

Datasheet

Conductors - Cross Section (mm ²)		300
Dimensions (mm)		
Hole Diameter (mm)		17,5
Screw*		
Inches		5/8
Metric		M16
L		41,5
A		103,0
CB		47,0
AF		19,0
D		40,0
E		5,0
Current (A)		902
Application Tool		
Mechanical Pliers		
Model		-
Die (AT-60)		-
Hydraulic Pliers (AY/CY/AHM/AHB)		
Circunferencial Die		IU-36
Hexagonal Die		H-36

Package	
Qty. / Package	10
Unit Weight (g)	166,70