# TF-L - COPPER TERMINAL FOR FLEXIBLE CONDUCTORS (ONE HOLE / LONG BARREL)

TF-400-L-17

## Description

**Purpose:** Termination of copper conductors.


**Characteristics:** High electrical conductivity and corrosion resistance. Pad with several hole diameter options and optimum electrical contact. Expanded shape barrel for easy insertion of flexible conductors.

**Applications:** Electrical panels, circuit breaker connections, motors, machines, busbars, electrical distribution boards, among others.

**Material:** Electrolytic copper.

**Finish:** Tin Plated.



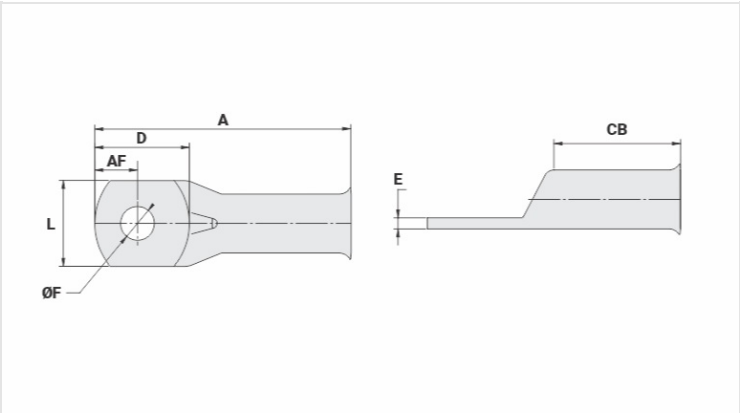


## Datasheet

| | |
|---|---|
| **Conductors - Cross Section (mm²)** | 400 |
| **Dimensions (mm)** | |
| Hole Diameter (mm) | 17,5 |
| Screw* | |
| Inches | 5/8 |
| Metric | M16 |
| L | 46,8 |
| A | 124,0 |
| CB | 62,0 |
| AF | 19,0 |
| D | 42,0 |
| E | 5,3 |
| **Current (A)** | 1085 |
| **Application Tool** | |
| Mechanical Pliers | |
| Model | - |
| Die (AT-60) | - |
| Hydraulic Pliers (AY/CY/AHM/AHB) | |
| Circunferencial Die | IU-40 |
| Hexagonal Die | H-40 |

| Package | |
|---|---|
| Qty. / Package | 8 |
| Unit Weight (g) | 265,80 |