


TF-2 - COPPER TERMINAL FOR FLEXIBLE CONDUCTORS (TWO HOLES / SHORT BARREL)

TF-95-2

Description

- Purpose:** Termination of copper conductors.
- Characteristics:** High electrical conductivity and corrosion resistance. Pad with several hole diameter options and optimum electrical contact. Expanded shape barrel for easy insertion of flexible conductors.
- Applications:** Electrical panels, circuit breaker connections, motors, machines, busbars, electrical distribution boards, among others.
- Material:** Electrolytic copper.
- Finish:** Tin Plated.

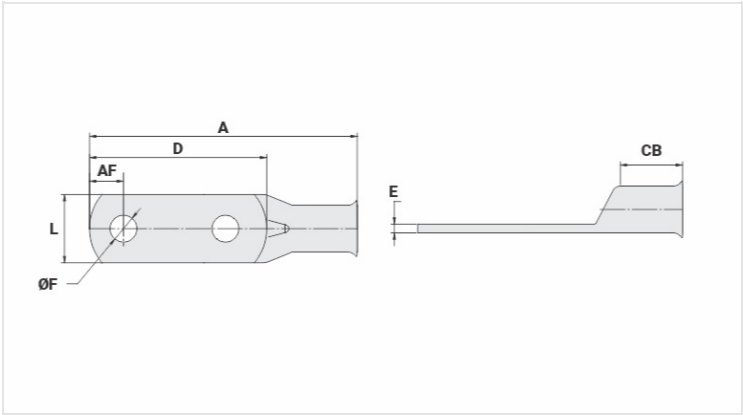

Datasheet

Conductors - Cross Section (mm ²)	95
Dimensions (mm)	
Hole Diameter (mm)	13,8
Screw*	
Inches	1/2
Metric	M12
L	24,0
A	94,5
CB	17,5
AF	10,0
D	66,4
E	3,0
Current (A)	430
Application Tool	
Mechanical Pliers	
Model	AT-60/68
Die (AT-60)	IW-27
Hydraulic Pliers (AY/CY/AHM/AHB)	
Circunferencial Die	IU-27
Hexagonal Die	H-27

Package	
Qty. / Package	20
Unit Weight (g)	50,00