


TF-2 - COPPER TERMINAL FOR FLEXIBLE CONDUCTORS (TWO HOLES / SHORT BARREL)

TF-150-2

Description

- Purpose:** Termination of copper conductors.
- Characteristics:** High electrical conductivity and corrosion resistance. Pad with several hole diameter options and optimum electrical contact. Expanded shape barrel for easy insertion of flexible conductors.
- Applications:** Electrical panels, circuit breaker connections, motors, machines, busbars, electrical distribution boards, among others.
- Material:** Electrolytic copper.
- Finish:** Tin Plated.

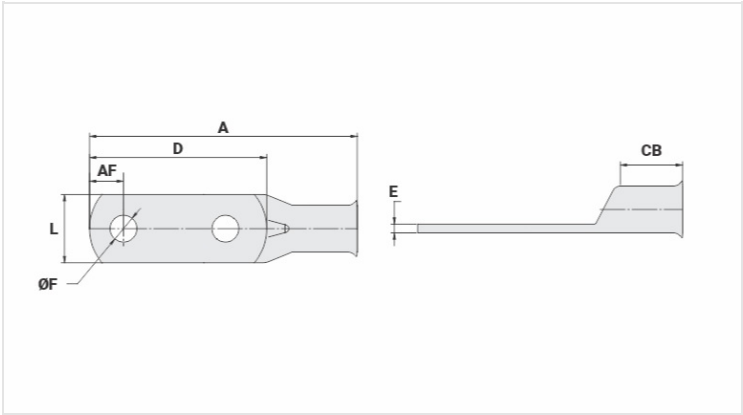

Datasheet

Conductors - Cross Section (mm²)	150
Dimensions (mm)	
Hole Diameter (mm)	13,8
Screw*	
Inches	1/2
Metric	M12
L	30,0
A	110,0
CB	24,0
AF	13,0
D	74,0
E	3,6
Current (A)	577
Application Tool	
Mechanical Pliers	
Model	-
Die (AT-60)	-
Hydraulic Pliers (AY/CY/AHM/AHB)	
Circunferencial Die	IU-30
Hexagonal Die	H-30

Package	
Qty. / Package	20
Unit Weight (g)	97,00