


TF-2L - COPPER TERMINAL FOR FLEXIBLE CONDUCTORS (TWO HOLES / LONG BARREL)

TF-35-2L-10

Description

- Purpose:** Termination of copper conductors.
- Characteristics:** High electrical conductivity and corrosion resistance. Pad with several hole diameter options and optimum electrical contact. Expanded shape barrel for easy insertion of flexible conductors.
- Applications:** Electrical panels, circuit breaker connections, motors, machines, busbars, electrical distribution boards, among others.
- Material:** Electrolytic copper.
- Finish:** Tin Plated.

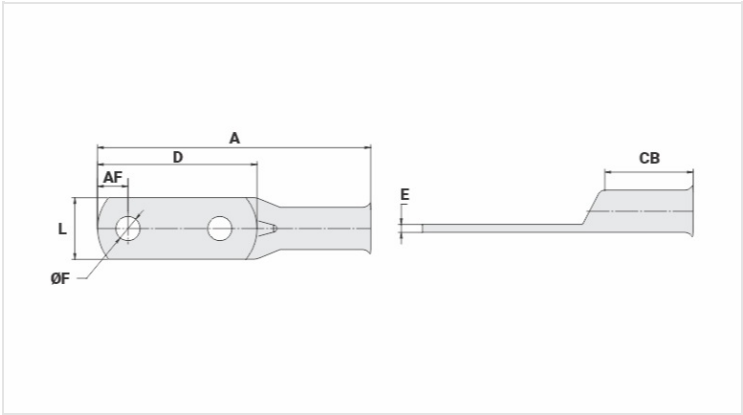

Datasheet

Conductors - Cross Section (mm²)	35
Dimensions (mm)	
Hole Diameter (mm)	10,5
Screw*	
Inches	3/8
Metric	M10
L	15,0
A	65,5
CB	22,5
AF	8,0
D	36,5
E	2,4
Current (A)	226
Application Tool	
Mechanical Pliers	
Model	AT-60/68
Die (AT-60)	IW-4
Hydraulic Pliers (AY/CY/AHM/AHB)	
Circunferencial Die	IU-4
Hexagonal Die	H-4

Package	
Qty. / Package	50
Unit Weight (g)	16,30