# TF-2L - COPPER TERMINAL FOR FLEXIBLE CONDUCTORS (TWO HOLES / LONG BARREL)

TF-120-2L-10

## Description

**Purpose:** Termination of copper conductors.

**Characteristics:** High electrical conductivity and corrosion resistance. Pad with several hole diameter options and optimum electrical contact. Expanded shape barrel for easy insertion of flexible conductors.

**Applications:** Electrical panels, circuit breaker connections, motors, machines, busbars, electrical distribution boards, among others.

**Material:** Electrolytic copper.

**Finish:** Tin Plated.

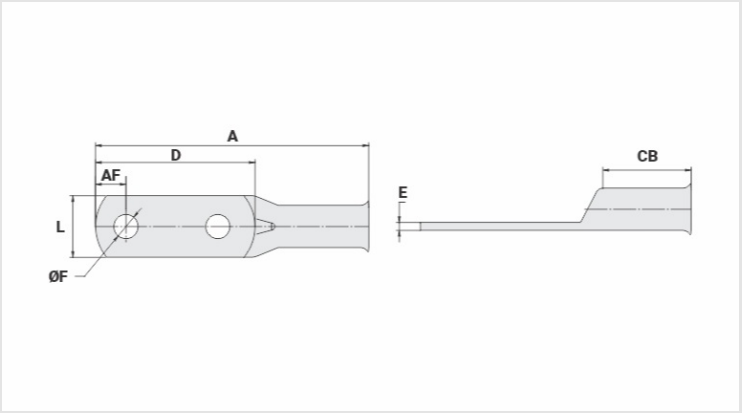


## Datasheet

| | |
|---|---|
| **Conductors - Cross Section (mm²)** | 120 |
| **Dimensions (mm)** | |
| Hole Diameter (mm) | 10,5 |
| Screw* | |
| Inches | 3/8 |
| Metric | M10 |
| L | 27,0 |
| A | 117,5 |
| CB | 34,5 |
| AF | 13,0 |
| D | 73,6 |
| E | 3,3 |
| **Current (A)** | 500 |
| **Application Tool** | |
| Mechanical Pliers | |
| Model | AT-60/68 |
| Die (AT-60) | IW-29 |
| Hydraulic Pliers (AY/CY/AHM/AHB) | |
| Circunferencial Die | IU-29 |
| Hexagonal Die | H-29 |

| Package | |
|---|---|
| Qty. / Package | 20 |
| Unit Weight (g) | 85,80 |