


TF-2L - COPPER TERMINAL FOR FLEXIBLE CONDUCTORS (TWO HOLES / LONG BARREL)

TF-400-2L-17

Description

- Purpose:** Termination of copper conductors.
- Characteristics:** High electrical conductivity and corrosion resistance. Pad with several hole diameter options and optimum electrical contact. Expanded shape barrel for easy insertion of flexible conductors.
- Applications:** Electrical panels, circuit breaker connections, motors, machines, busbars, electrical distribution boards, among others.
- Material:** Electrolytic copper.
- Finish:** Tin Plated.

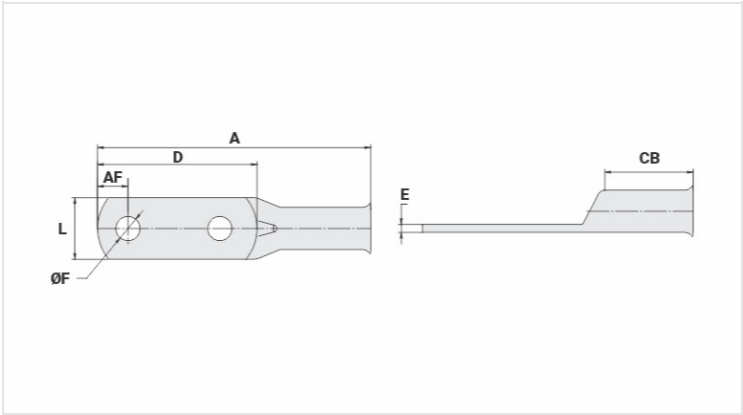

Datasheet

Conductors - Cross Section (mm ²)	400
Dimensions (mm)	
Hole Diameter (mm)	17,5
Screw*	
Inches	5/8
Metric	M16
L	46,8
A	168,0
CB	64,0
AF	19,0
D	86,4
E	5,3
Current (A)	1085
Application Tool	
Mechanical Pliers	
Model	-
Die (AT-60)	-
Hydraulic Pliers (AY/CY/AHM/AHB)	
Circunferencial Die	IU-40
Hexagonal Die	H-40

Package	
Qty. / Package	10
Unit Weight (g)	347,50