


TAL-2 - EXTRUDED ALUMINUM TERMINAL (TWO HOLES)

TAL-44-2

Description

- Purpose:** Cable to busbar termination for CA or CAA aluminum cables.
- Characteristics:** Compression connection. High electrical conductivity and resistance to corrosion.
- Application:** Power distribution lines.
- Material:** Extruded aluminum. Supplied with antioxidant compound INTELTROX.

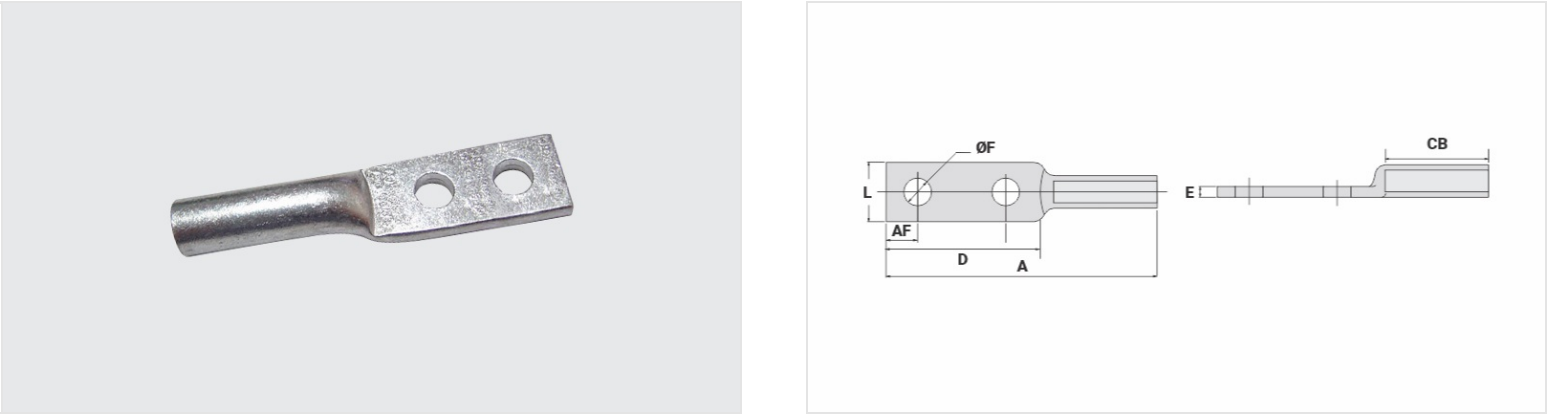

Datasheet

Conductors		
Compact AAC		50
AWG/MCM		
CA (aluminium cable)		1/0
ACSR/AW		1/0
Dimensions (mm)		
Hole Diameter (mm)		14,0
Screw		
Inches		1/2
Metric		M12
L		24,0
A		159,0
CB		72,00
D		76,00
E		5,5
AF		16,0
Application Tool		
Mechanical Pliers (AT-60 4t)		
Die		IW-243
Compressions		4
Hydraulic Pliers (AY/CY/AHM/AHB)		
Die		IU-243
Compressions		2

Package	
Qty. / Package	100
Unit Weight (g)	58,30