


TAL-2 - EXTRUDED ALUMINUM TERMINAL (TWO HOLES)

TAL-58-2

Description

- Purpose:** Cable to busbar termination for CA or CAA aluminum cables.
- Characteristics:** Compression connection. High electrical conductivity and resistance to corrosion.
- Application:** Power distribution lines.
- Material:** Extruded aluminum. Supplied with antioxidant compound INTELTROX.

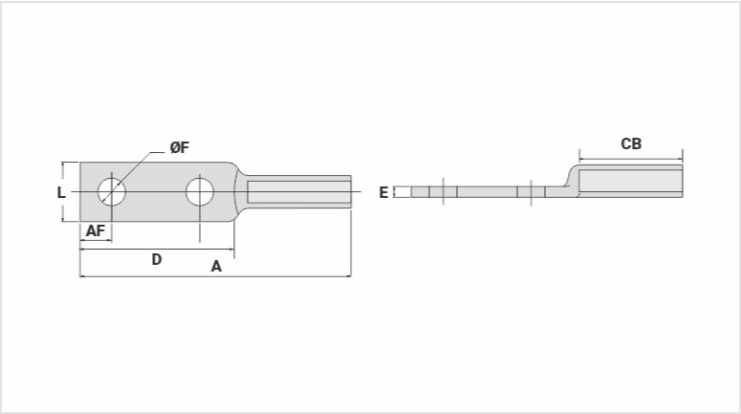

Datasheet

Conductors		
Compact AAC		95
AWG/MCM		
CA (aluminium cable)		3/0
ACSR/AW		-
Dimensions (mm)		
Hole Diameter (mm)		14,0
Screw		
Inches		1/2
Metric		M12
L		27,0
A		160,0
CB		72,0
D		76,0
E		6,8
AF		16,0
Application Tool		
Mechanical Pliers (AT-60 4t)		
Die		IW-247
Compressions		6
Hydraulic Pliers (AY/CY/AHM/AHB)		
Die		IU-247
Compressions		3

Package	
Qty. / Package	30
Unit Weight (g)	74,30