


TAL-2 - EXTRUDED ALUMINUM TERMINAL (TWO HOLES)

TAL-60-2

Description

- Purpose:** Cable to busbar termination for CA or CAA aluminum cables.
- Characteristics:** Compression connection. High electrical conductivity and resistance to corrosion.
- Application:** Power distribution lines.
- Material:** Extruded aluminum. Supplied with antioxidant compound INTELTROX.

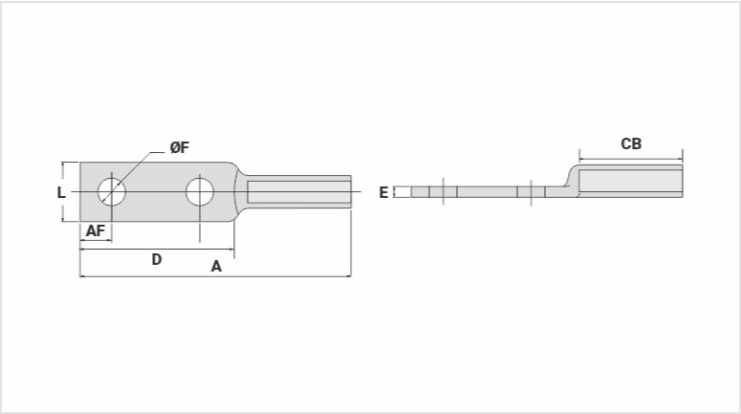

Datasheet

Conductors		
Compact AAC		120
AWG/MCM		
CA (aluminium cable)		4/0
ACSR/AW		4/0
Dimensions (mm)		
Hole Diameter (mm)		14,0
Screw		
Inches		1/2
Metric		M12
L		32,0
A		173,0
CB		81,0
D		78,0
E		8,2
AF		16,0
Application Tool		
Mechanical Pliers (AT-60 4t)		
Die		IW-249
Compressions		6
Hydraulic Pliers (AY/CY/AHM/AHB)		
Die		IU-249
Compressions		3

Package	
Qty. / Package	50
Unit Weight (g)	108,00