

TBTA - BIMETALLIC COMPRESSION TERMINAL

TBTA-25-10

Description


Purpose: Bimetallic cable to busbar termination (aluminum or ALUMOSTEEL cable to copper busbar).

Characteristics: Compression connection. Its construction (copper pad and aluminum barrel) prevents the formation of galvanic corrosion. Pad with one hole.

Applications: Power distribution lines.

Material: Electrolytic copper pad and extruded aluminum barrel. Supplied with antioxidant compound INTELTROX.

Note: For installation in regions of aggressive enviroments, it is recommended to use thermoset insulation or self-fusing tape in the connection.

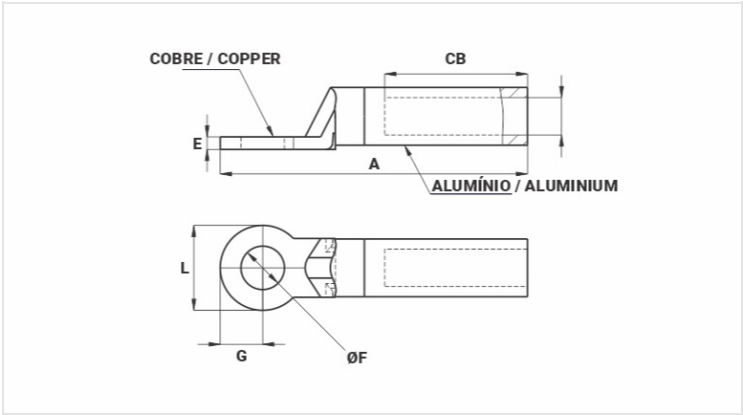

Datasheet

AAC Conductor

AWG/MCM	4
Compact (mm²)	25

Dimensions (mm)

Hole Diameter (mm)	10,5
L	20,0
A	82,0
CB	42,0
E	3,8
G	10,0

Application Tool

Mechanical Pliers (AT-60 4t)	
Die (IW)	162
Qty. of Compressions	5
Hydraulic Pliers (AY/CY/AHM/AHB)	
Die (IU)	162
Die (MH)	-
Qty. of Compressions	2
Compressor+Head kit (CY-630 3m) 23t	
Die (H)	-

Qty. of Compressions	-
Package	
Qty. / Package	80
Unit Weight (g)	28,40