

TBB - BIMETALLIC TERMINAL FOR TERMINAL BLOCK

TBB-10-25

Description


Purpose: Bimetallic termination cable-strip (aluminum cable to copper block). Connection on terminal block, transformer bushing, circuit breakers.

Characteristics: Compression connection. Its construction (copper pin and aluminum barrel) prevents galvanic corrosion.

Applications: Power distribution lines.

Material: Electrolytic copper pin and extruded aluminum barrel. Supplied with INTELTROX antioxidant compound.

Note: For installation in regions of aggressive climate, it is recommended to use thermoset insulation or self-fusing tape in the connection.

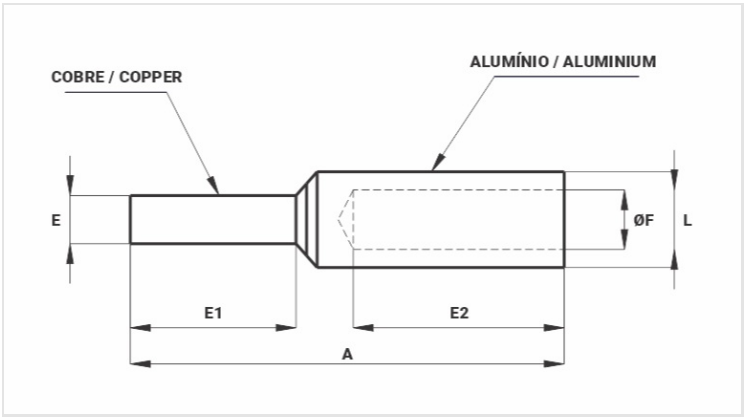

Datasheet

AAC Conductor

| | |
|---------|----|
| AWG/MCM | 8 |
| mm² | 10 |

Dimensions (mm)

| | |
|----|------|
| L | 9,7 |
| A | 57,0 |
| E2 | 25,0 |
| E | 4,0 |
| ØI | 5,0 |

Application Tool

| | |
|----------------------------------|-----|
| Mechanical Pliers (AT-60 4t) | |
| Die (IW) | 161 |
| Hydraulic Pliers (AY/CY/AHM/AHB) | |
| Die (IU) | 161 |
| Die (MH) | - |

Package

| | |
|-----------------|-----|
| Qty. / Package | 100 |
| Unit Weight (g) | 8,2 |

