

TBB - BIMETALLIC TERMINAL FOR TERMINAL BLOCK

TBB-25-30

Description


Purpose: Bimetallic termination cable-strip (aluminum cable to copper block). Connection on terminal block, transformer bushing, circuit breakers.

Characteristics: Compression connection. Its construction (copper pin and aluminum barrel) prevents galvanic corrosion.

Applications: Power distribution lines.

Material: Electrolytic copper pin and extruded aluminum barrel. Supplied with INTELTROX antioxidant compound.

Note: For installation in regions of aggressive climate, it is recommended to use thermoset insulation or self-fusing tape in the connection.

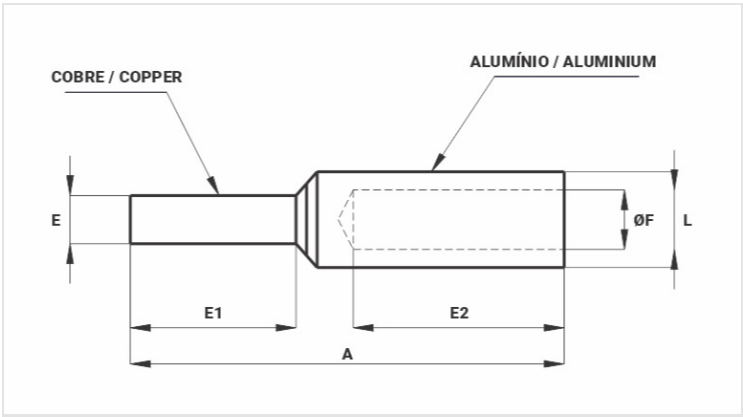

Datasheet

AAC Conductor

AWG/MCM	4
mm²	25

Dimensions (mm)

L	11,5
A	80,0
E2	42,0
E	5,0
ØI	7,0

Application Tool

Mechanical Pliers (AT-60 4t)	
Die (IW)	162
Hydraulic Pliers (AY/CY/AHM/AHB)	
Die (IU)	162
Die (MH)	-

Package

Qty. / Package	100
Unit Weight (g)	10,8

