# TBB - BIMETALLIC TERMINAL FOR TERMINAL BLOCK

TBB-25-30

## Description

**Purpose:** Bimetallic termination cable-strip (aluminum cable to copper block). Connection on terminal block, transformer bushing, circuit breakers.


**Characteristics:** Compression connection. Its construction (copper pin and aluminum barrel) prevents galvanic corrosion.

**Applications:** Power distribution lines.

**Material:** Electrolytic copper pin and extruded aluminum barrel. Supplied with INTELTROX antioxide compound.

**Note:** For installation in regions of aggressive climate, it is recommended to use thermoset insulation or self-fusing tape in the connection.

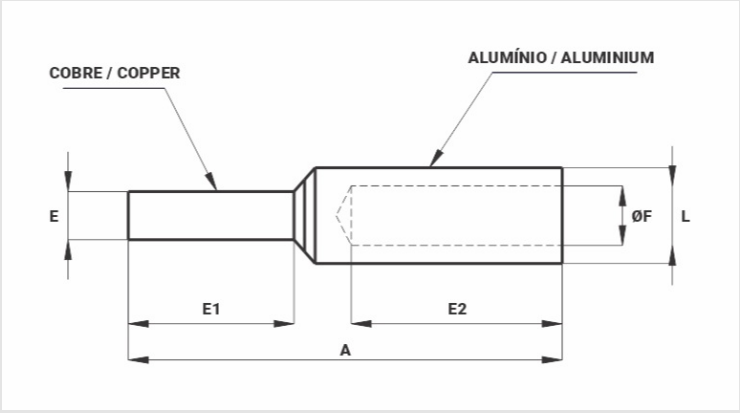


## Datasheet

| | |
|---|---|
| **AAC Conductor** | |
| AWG/MCM | 4 |
| mm² | 25 |
| **Dimensions (mm)** | |
| L | 11,5 |
| A | 80,0 |
| E2 | 42,0 |
| E | 5,0 |
| ØI | 7,0 |
| **Application Tool** | |
| Mechanical Pliers (AT-60 4t) | |
| Die (IW) | 162 |
| Qty. of Compressions | 5 |
| Hydraulic Pliers (AY/CY/AHM/AHB) | |
| Die (IU) | 162 |
| Die (MH) | - |
| Qty. of Compressions | 2 |
| **Package** | |
| Qty. / Package | 100 |

| | |
|---|---|
| Unit Weight (g) | 10,8 |