TBB - BIMETALLIC TERMINAL FOR TERMINAL BLOCK

TBB-50-45

Description

Purpose: Bimetallic termination cable-strip (aluminum cable to copper block). Connection on terminal block, transformer bushing, circuit breakers.


Characteristics: Compression connection. Its construction (copper pin and aluminum barrel) prevents galvanic corrosion.

Applications: Power distribution lines.

Material: Electrolytic copper pin and extruded aluminum barrel. Supplied with INTELTROX antioxide compound.

Note: For installation in regions of aggressive climate, it is recommended to use thermoset insulation or self-fusing tape in the connection.



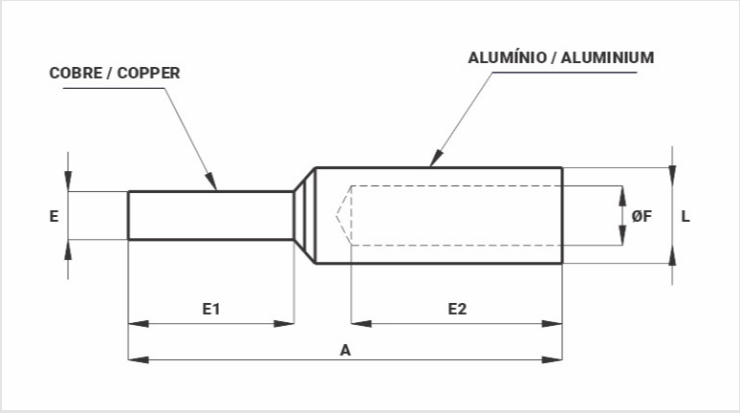

Datasheet

AAC Conductor	
AWG/MCM	1/0
mm²	50
Dimensions (mm)	
L	16,0
A	94,0
E2	42,0
E	7,0
ØI	10,0
Application Tool	
Mechanical Pliers (AT-60 4t)	
Die (IW)	243
Qty. of Compressions	4
Hydraulic Pliers (AY/CY/AHM/AHB)	
Die (IU)	243
Die (MH)	243A
Qty. of Compressions	2
Package	
Qty. / Package	80

Unit Weight (g)	20,5