

TBB - BIMETALLIC TERMINAL FOR TERMINAL BLOCK

TBB-70-45

Description


**Purpose:** Bimetallic termination cable-strip (aluminum cable to copper block). Connection on terminal block, transformer bushing, circuit breakers.

**Characteristics:** Compression connection. Its construction (copper pin and aluminum barrel) prevents galvanic corrosion.

**Applications:** Power distribution lines.

**Material:** Electrolytic copper pin and extruded aluminum barrel. Supplied with INTELTROX antioxidant compound.

**Note:** For installation in regions of aggressive climate, it is recommended to use thermoset insulation or self-fusing tape in the connection.

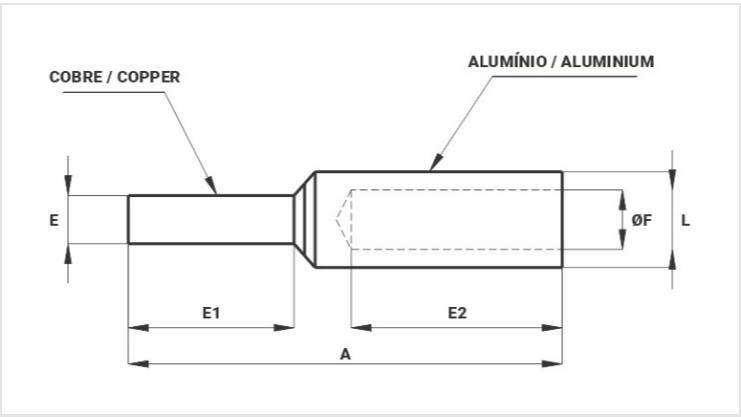

Datasheet

AAC Conductor		
AWG/MCM		2/0
mm²		70
Dimensions (mm)		
L		17
A		94,0
E2		42,0
E		8,0
ØI		11,0
Application Tool		
Mechanical Pliers (AT-60 4t)		
Die (IW)		245
Qty. of Compressions		4
Hydraulic Pliers (AY/CY/AHM/AHB)		
Die (IU)		245
Die (MH)		245A
Qty. of Compressions		2
Package		
Qty. / Package		80

