

TBB - BIMETALLIC TERMINAL FOR TERMINAL BLOCK

TBB-95-45

Description


Purpose: Bimetallic termination cable-strip (aluminum cable to copper block). Connection on terminal block, transformer bushing, circuit breakers.

Characteristics: Compression connection. Its construction (copper pin and aluminum barrel) prevents galvanic corrosion.

Applications: Power distribution lines.

Material: Electrolytic copper pin and extruded aluminum barrel. Supplied with INTELTROX antioxidant compound.

Note: For installation in regions of aggressive climate, it is recommended to use thermoset insulation or self-fusing tape in the connection.

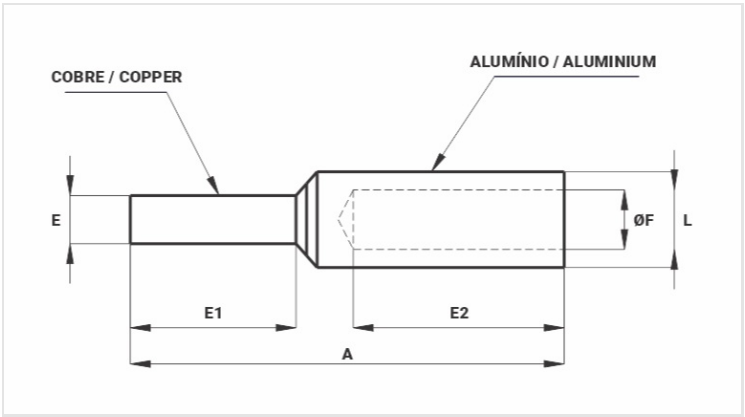

Datasheet

AAC Conductor

AWG/MCM	3/0
mm²	95

Dimensions (mm)

L	19,5
A	94,0
E2	42,0
E	9,0
ØI	12,7

Application Tool

Mechanical Pliers (AT-60 4t)	
Die (IW)	247
Hydraulic Pliers (AY/CY/AHM/AHB)	
Die (IU)	247
Die (MH)	247A

Package

Qty. / Package	80
Unit Weight (g)	33,9

