

TBB - BIMETALLIC TERMINAL FOR TERMINAL BLOCK

TBB-120-55

Description


**Purpose:** Bimetallic termination cable-strip (aluminum cable to copper block). Connection on terminal block, transformer bushing, circuit breakers.

**Characteristics:** Compression connection. Its construction (copper pin and aluminum barrel) prevents galvanic corrosion.

**Applications:** Power distribution lines.

**Material:** Electrolytic copper pin and extruded aluminum barrel. Supplied with INTELTROX antioxidant compound.

**Note:** For installation in regions of aggressive climate, it is recommended to use thermoset insulation or self-fusing tape in the connection.

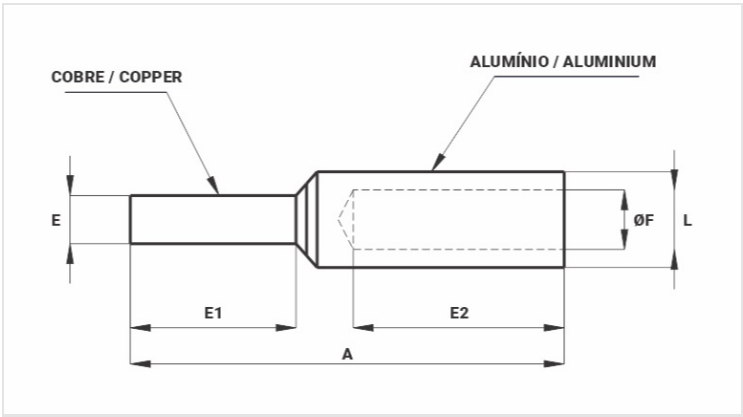

Datasheet

AAC Conductor

AWG/MCM	4/0
mm²	120

Dimensions (mm)

L	23
A	112,0
E2	50,0
E	10,0
ØI	15,0

Application Tool

Mechanical Pliers (AT-60 4t)	
Die (IW)	249
Qty. of Compressions	4
Hydraulic Pliers (AY/CY/AHM/AHB)	
Die (IU)	249
Die (MH)	249A
Qty. of Compressions	2

Package

Qty. / Package	20
----------------	----

