

TTAC - ALUMINUM CABLE-BUSBAR TERMINAL (STRAIGHT CONNECTION)

TTAC-1/0-250-2N

Description

Purpose: Cable to busbar termination for CA or CAA aluminum cables.


Characteristics: Mechanical connection. High electrical conductivity. Pad with two or four NEMA standard holes. There are lugs that lock the head of the screws.

Application: Power distribution lines and substations.

Material: Cast aluminum alloy and hot galvanized steel fittings.

Application Tool: Star or open-ended wrench.

Note: Using of the antioxiide compound INTELTROX is recommended.

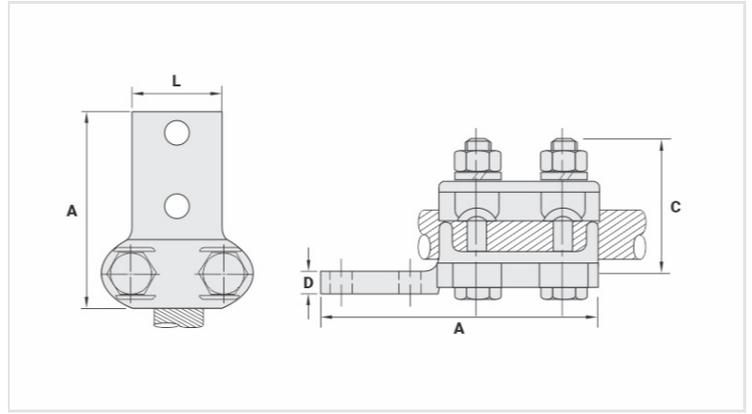

Datasheet

Conductors

AAC (AWG/MCM) 1/0 - 250

ACSR/AW (AWG) 1/0 - 4/0

Screw M12

Dimensions (mm)

L 42,0

A 155,0

C 60,0

D 10,0

No. of Holes 2

Package

Qty. / Package 10

Unit Weight (g) 645,00