


TTAC - ALUMINUM CABLE-BUSBAR TERMINAL (STRAIGHT CONNECTION)

TTAC-1/0-250-2N

Description

- Purpose:** Cable to busbar termination for CA or CAA aluminum cables.
- Characteristics:** Mechanical connection. High electrical conductivity. Pad with two or four NEMA standard holes. There are lugs that lock the head of the screws.
- Application:** Power distribution lines and substations.
- Material:** Cast aluminum alloy and hot galvanized steel fittings.
- Application Tool:** Star or open-ended wrench.
- Note:** Using of the antioxidant compound INTELTROX is recommended.

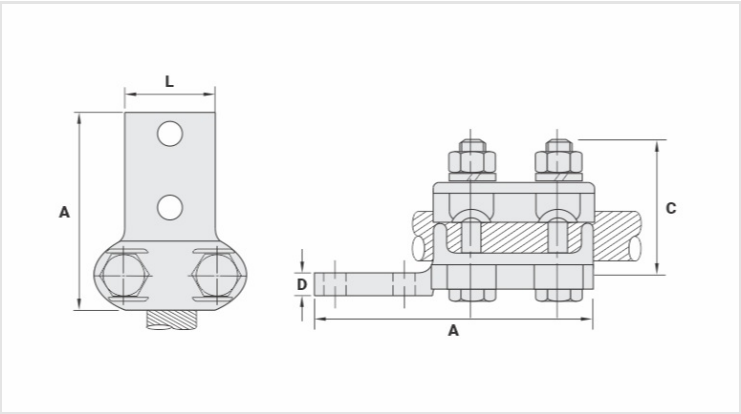

Datasheet

Conductors

AAC (AWG/MCM)	1/0 - 250
ACSR/AW (AWG)	1/0 - 4/0

Screw	M12
-------	-----

Dimensions (mm)

L	42,0
A	155,0
C	60,0
D	10,0
Qty. of Holes	2

Package

Qty. / Package	10
Unit Weight (g)	645,00