


TTAC - ALUMINUM CABLE-BUSBAR TERMINAL (STRAIGHT CONNECTION)

TTAC-250-400-2N

Description

- Purpose:** Cable to busbar termination for CA or CAA aluminum cables.
- Characteristics:** Mechanical connection. High electrical conductivity. Pad with two or four NEMA standard holes. There are lugs that lock the head of the screws.
- Application:** Power distribution lines and substations.
- Material:** Cast aluminum alloy and hot galvanized steel fittings.
- Application Tool:** Star or open-ended wrench.
- Note:** Using of the antioxiide compound INTELTROX is recommended.

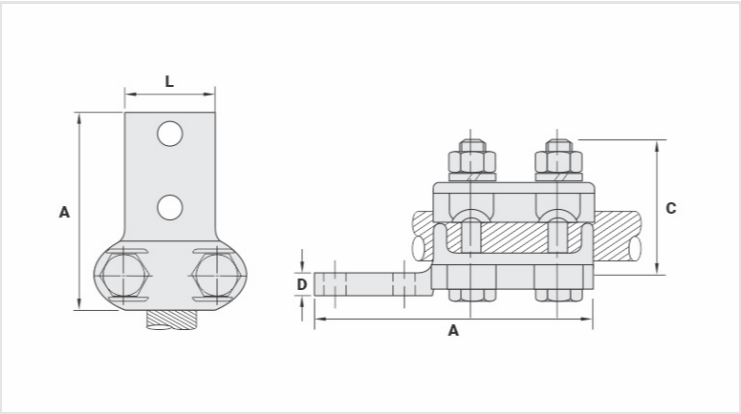

Datasheet

Conductors

AAC (AWG/MCM)	250 - 400
ACSR/AW (AWG)	4/0 - 397,5

Screw

M12

Dimensions (mm)

L	42,0
A	162,0
C	60,0
D	10,0
No. of Holes	2

Package

Qty. / Package	5
Unit Weight (g)	715,00