

383,00

CTRA - ALUMINUM CABLE-BUSBAR TERMINAL (STRAIGHT OR 90º CONNECTION)

CTRA-6-636-2N

Description

Purpose: Cable to busbar termination for CA or CAA aluminum cables.

Characteristics: Mechanical connection. High electrical conductivity. Pad with two or four holes NEMA standard.

With a single item meets a wide range of cables. Straight or 90° in relation to the bus.


Application: Power distribution lines and substation.

Material: Cast aluminum alloy and stainless steel fittings.

Application Tool: Star or open-ended wrench.

Note: The use of the antioxide compound INTELTROX is recommended.



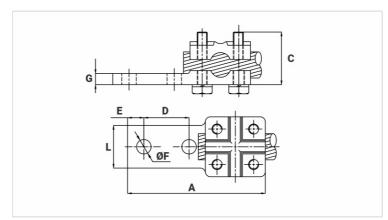

Datasheet

Unit Weight (g)

Conducto	S .	
mm²	16 - 300	
AWG/M	M 6 - 636	
Dimensions (mm)		
L	137,0	
А	45,0	
С	42,0	
D	44,5	
Е	16,0	
ØF	14,0	
G	11,0	
Screw	M10	
Qty. of I	oles 2	
Package		
Qty. / Pa	ckage 6	