CTRA - ALUMINUM CABLE-BUSBAR TERMINAL (STRAIGHT OR 90º CONNECTION)

CTRA-6-636-2N

Description

Purpose: Cable to busbar termination for CA or CAA aluminum cables.

Characteristics: Mechanical connection. High electrical conductivity. Pad with two or four holes NEMA standard. With a single item meets a wide range of cables. Straight or 90º in relation to the bus.


Application: Power distribution lines and substation.

Material: Cast aluminum alloy and stainless steel fittings.

Application Tool: Star or open-ended wrench.

Note: The use of the antioxide compound INTELTROX is recommended.



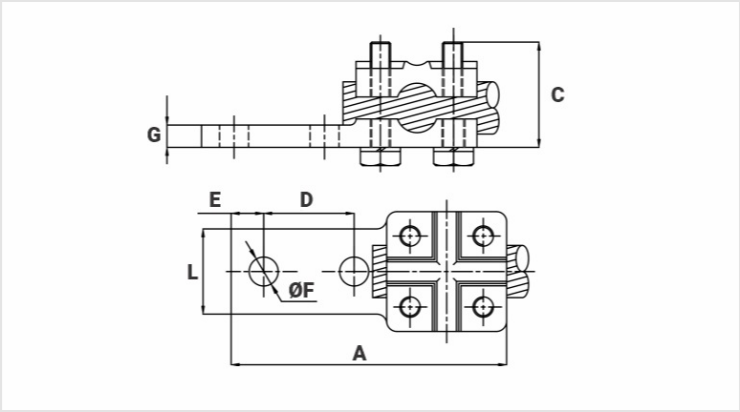

Datasheet

Conductors	
mm²	16 - 300
AWG/MCM	6 - 636
Dimensions (mm)	
L	137,0
A	45,0
C	42,0
D	44,5
E	16,0
ØF	14,0
G	11,0
Screw	M10
Qty. of Holes	2
Package	
Qty. / Package	6
Unit Weight (g)	383,00