TTBC - COPPER CABLE-BUSBAR TERMINAL (STRAIGHT CONNECTION)

TTBC-4-1/0-2N

Description

Purpose: Cable to busbar termination for copper cables.

Characteristics: Tightening connection. High electrical conductivity. Pad with two or four holes NEMA standard. There are lugs that lock the head of the screws.


Application: Power distribution lines and substations.

Material: Bronze terminal, fittings in copper alloy.

Application Tool: Star or open-ended wrench.

Note: The use of the antioxide compound INTELTROX-Cu is recommended.



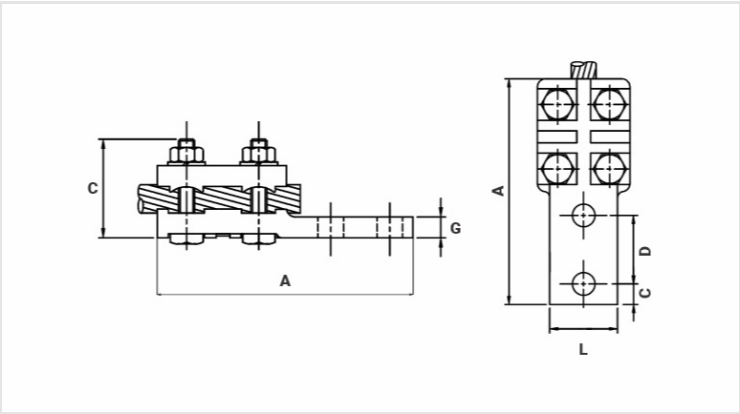

Datasheet

Conductors	
Minimum	
mm²	25
AWG/MCM	4
Maximum	
mm²	50
AWG/MCM	1/0
Dimensions (mm)	
Screw	M10
L	32,0
A	140,0
C	45,0
D	44,5
E	16,0
G	10,0
Qty. of Holes	2
Package	
Qty. / Package	15
Unit Weight (g)	723,00