

TPAM - PRESSURE TERMINAL WITH SPRING EFFECT

TPAM-50

Description

Purpose: Cable to busbar termination for aluminum AC or ACSR and copper cables. Knife switch termination and transformer bushing.


Characteristics: Spring system connection (permanent tightening). High electrical conductivity and corrosion resistance. Pad with two or four holes NEMA* standard. Reusable.

Application: Power distribution lines.

Material: Aluminum alloy with corrosion inhibiting surface treatment. Supplied with antioxidant compound INTELTROX.

Application Tool: Star or open-ended wrench.

Note: It may be supplied with or without fittings (stainless steel bolts, nuts and washers).

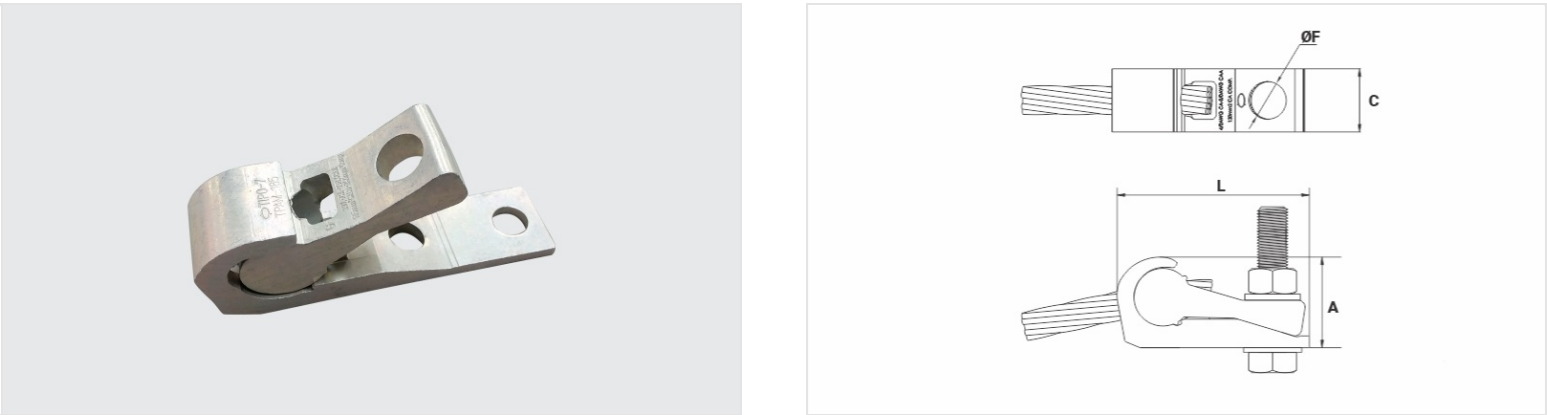

Datasheet

Diameter Range (mm)		
Smaller Side (P)		6,7 - 7,3
Larger Side (G)		7,31 - 8,1
Combinations (mm² / AWG)		
Smaller Side (P)		35 CA/Cu Comp.
Larger Side (G)		2 CA/Cu/CAA 35 CA/Cu 50 CA/Cu Comp.
Dimensions (mm)		
L		48,0
A		22,0
C		18,0
ØF		10,5
Thread / Length of Screw		M8x45
Package		
Qty. / Package		50
Unit Weight (g)		26,00