

TPAM - PRESSURE TERMINAL WITH SPRING EFFECT

TPAM-70

Description

Purpose: Cable to busbar termination for aluminum AC or ACSR and copper cables. Knife switch termination and transformer bushing.


Characteristics: Spring system connection (permanent tightening). High electrical conductivity and corrosion resistance. Pad with two or four holes NEMA* standard. Reusable.

Application: Power distribution lines.

Material: Aluminum alloy with corrosion inhibiting surface treatment. Supplied with antioxidant compound INTELTROX.

Application Tool: Star or open-ended wrench.

Note: It may be supplied with or without fittings (stainless steel bolts, nuts and washers).

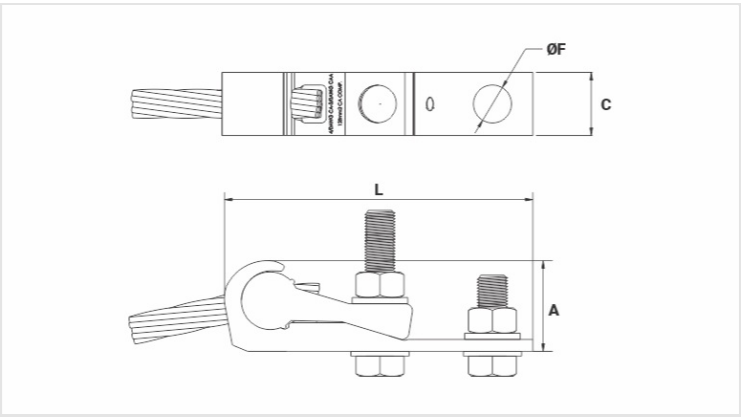

Datasheet

Diameter Range (mm)		
Smaller Side (P)		9 - 9,7
Larger Side (G)		10 - 10,6
Combinations (mm² / AWG)		
Smaller Side (P)	1/0 CA/Cu 50 CA/Cu/CAL 70 CA/Cu Comp.	
Larger Side (G)	2/0 CA/Cu 1/0 CAA 70 CA/Cu/CAL	
Dimensions (mm)		
L		106,0
A		28,0
C		22,0
ØF		15,0
Thread / Length of Screw	M10x30 M10x60	
Package		
Qty. / Package		40
Unit Weight (g)		63,00