

TPAM - PRESSURE TERMINAL WITH SPRING EFFECT

TPAM-150

Description

Purpose: Cable to busbar termination for aluminum AC or ACSR and copper cables. Knife switch termination and transformer bushing.


Characteristics: Spring system connection (permanent tightening). High electrical conductivity and corrosion resistance. Pad with two or four holes NEMA* standard. Reusable.

Application: Power distribution lines.

Material: Aluminum alloy with corrosion inhibiting surface treatment. Supplied with antioxidant compound INTELTROX.

Application Tool: Star or open-ended wrench.

Note: It may be supplied with or without fittings (stainless steel bolts, nuts and washers).

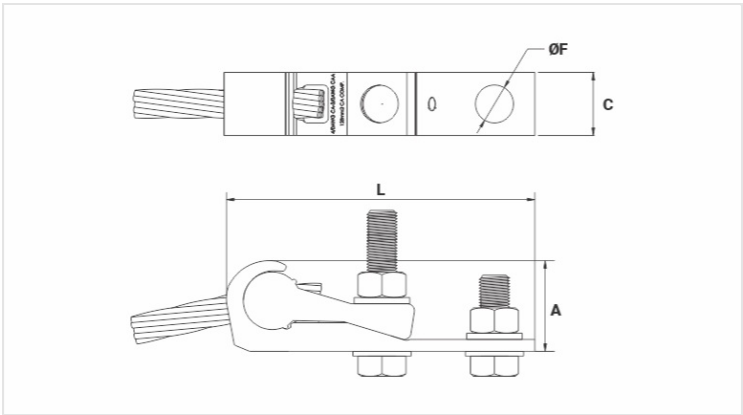

Datasheet

Diameter Range (mm)		
Smaller Side (P)		14,2 - 14,4
Larger Side (G)		14,5 - 15,1
Combinations (mm² / AWG)		
Smaller Side (P)		4/0 CAA 150 CA Comp.
Larger Side (G)		266,8 CA/Cu 120 CA/Cu
Dimensions (mm)		
L		123,0
A		36,0
C		30,0
ØF		15,0
Thread / Length of Screw		M12x40 M12x75
Package		
Qty. / Package		50
Unit Weight (g)		110,00