


LF - SPLICE SLEEVE FOR COPPER CABLES (LOW TRACTION)

LF-50

Description

- Purpose:** Rigid or flexible copper cable splice (low traction).
- Characteristics:** Compression connection. High electrical conductivity and corrosion resistance. Expanded shape ends for easy insertion of flexible conductors. With center wire stop.
- Application:** Electrical installations in general (residential, building, industrial).
- Material:** Electrolytic copper.
- Finish:** Tin plated.

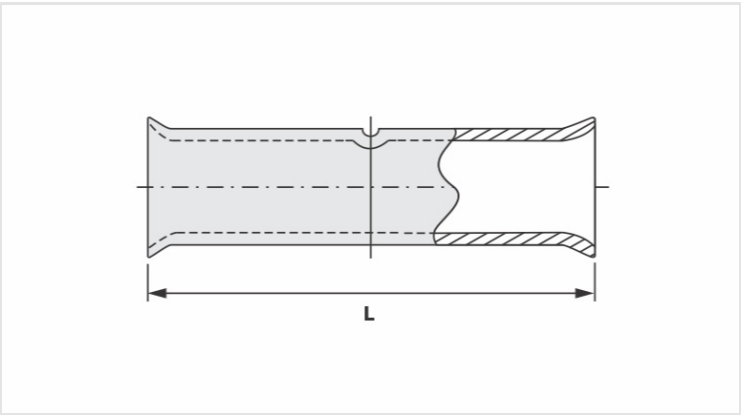

Datasheet

Conductors - Cross Section (mm²)	50
Current (A)	275
Dimension (mm) - L	47,0
Application Tool	
Mechanical Pliers	
Model	AT-60/68
Die (AT-60)	IW-1
Hydraulic Pliers (AY/CY/AHM/AHB)	
Circunferencial Die	IU-2
Hexagonal Die	H-2
Package	
Qty. / Package	50
Unit Weight (g)	20,00