LF - SPLICE SLEEVE FOR COPPER CABLES (LOW TRACTION)

LF-500

Description

Purpose: Rigid or flexible copper cable splice (low traction).


Characteristics: Compression connection. High electrical conductivity and corrosion resistance. Expanded shape ends for easy insertion of flexible conductors. With center wire stop.

Application: Electrical installations in general (residential, building, industrial).

Material: Electrolytic copper.

Finish: Tin plated.



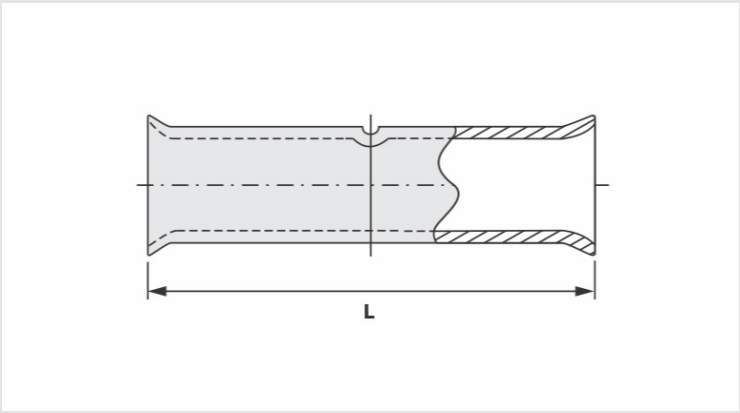

Datasheet

Conductors - Cross Section (mm²)	500
Current (A)	1253
Dimension (mm) - L	90,0
Application Tool	
Mechanical Pliers	
Model	-
Die (AT-60)	-
Hydraulic Pliers (AY/CY/AHM/AHB)	
Circunferencial Die	Sob Consulta
Hexagonal Die	Sob Consulta
Package	
Qty. / Package	8
Unit Weight (g)	216,00