


LB - BIMETALLIC COMPRESSION SLEEVE

LB-35-25

Description

- Purpose:** Bimetallic splice, between aluminum-copper cable (reduced traction).
- Characteristics:** Compression connection. Its joint aluminum and copper construction prevents the formation of galvanic corrosion.
- Application:** Power distribution lines.
- Material:** Extruded aluminum and electrolytic copper. Supplied with antioxidant compound INTELTRON (aluminum side only).

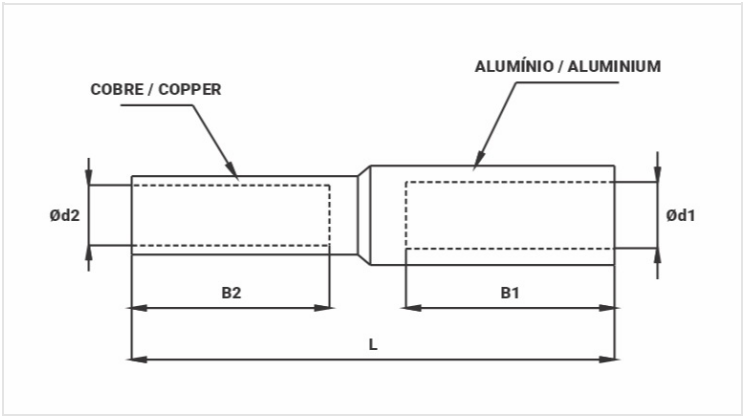

Datasheet

Aluminum Side		
AAC Conductor (AWG / mm² Comp.)		2 35
Dimensions (mm)		
Ø d2		8,5
B2		42,0
Application Tool		
AT-61		
IW		163
AY-96 / CY-96 / AHM-400 / AHB-400		
IU		163
MH		163A
Copper Side		
Conductor Cu/CS (mm²)		25
Dimensions (mm)		
Ø d3		7,8
B2		30,0
Application Tool		
AT-61		
IW		4
AY-96 / CY-96 / AHM-400 / AHB-400		
IU		4

MH	4
Dimension (mm) - L	92,0
Package	
Qty. / Package	50
Unit Weight (g)	25,20