

LB - BIMETALLIC COMPRESSION SLEEVE

LB-50-35


Description

Purpose: Bimetallic splice, between aluminum-copper cable (reduced traction).

Characteristics: Compression connection. Its joint aluminum and copper construction prevents the formation of galvanic corrosion.

Application: Power distribution lines.

Material: Extruded aluminum and electrolytic copper. Supplied with antioxidant compound INTELTRON (aluminum side only).

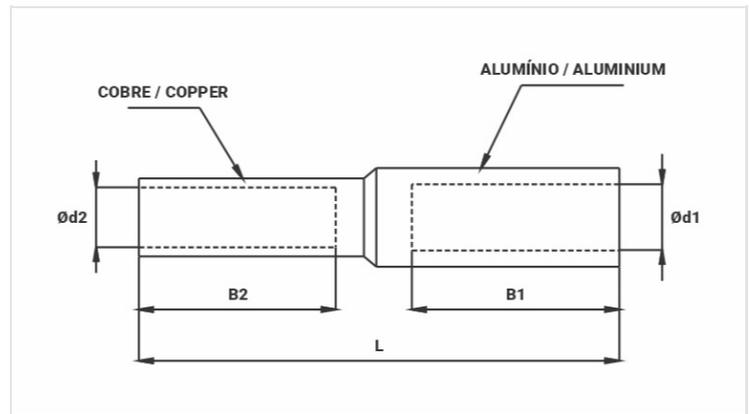

Datasheet

Aluminum Side

AAC Conductor (AWG / mm ² Comp.)	1/0 50
Dimensions (mm)	
Ø d2	10,0
B2	42,0
Application Tool	
AT-61	
IW	243
AY-96 / CY-96 / AHM-400 / AHB-400	
IU	243
MH	243A

Copper Side

Conductor Cu/CS (mm ²)	35
Dimensions (mm)	
Ø d3	9,0
B2	30,2
Application Tool	
AT-61	
IW	2
AY-96 / CY-96 / AHM-400 / AHB-400	
IU	2

MH

2

Dimension (mm) - L

87,0

Package

Qty. / Package

30

Unit Weight (g)

37,40