LB - BIMETALLIC COMPRESSION SLEEVE

LB-50-35

Description


Purpose: Bimetallic splice, between aluminum-copper cable (reduced traction).

Characteristics: Compression connection. Its joint aluminum and copper construction prevents the formation of galvanic corrosion.

Application: Power distribution lines.

Material: Extruded aluminum and electrolytic copper. Supplied with antioxide compound INTELTROX (aluminum side only).



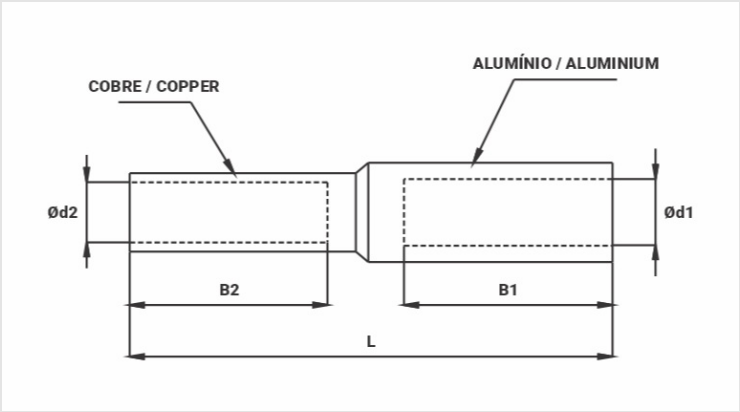

Datasheet

Aluminum Side	
AAC Conductor (AWG / mm² Comp.)	1/0 | 50
Dimensions (mm)	
Ø d2	10,0
B2	42,0
Application Tool	
AT-61	
IW	243
AY-96 / CY-96 / AHM-400 / AHB-400	
IU	243
MH	243A
Copper Side	
Conductor Cu/CS (mm²)	35
Dimensions (mm)	
Ø d3	9,0
B2	30,2
Application Tool	
AT-61	
IW	2
AY-96 / CY-96 / AHM-400 / AHB-400	
IU	2

MH	2
Dimension (mm) - L	87,0
Package	
Qty. / Package	30
Unit Weight (g)	37,40