

LB - BIMETALLIC COMPRESSION SLEEVE

LB-70-50


Description

Purpose: Bimetallic splice, between aluminum-copper cable (reduced traction).

Characteristics: Compression connection. Its joint aluminum and copper construction prevents the formation of galvanic corrosion.

Application: Power distribution lines.

Material: Extruded aluminum and electrolytic copper. Supplied with antioxidant compound INTELTRON (aluminum side only).

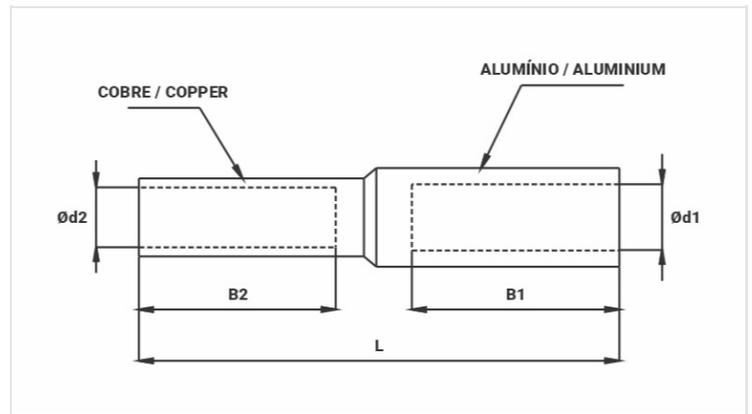

Datasheet

Aluminum Side

AAC Conductor (AWG / mm ² Comp.)	2/0 70
Dimensions (mm)	
Ø d2	11,0
B2	42,0
Application Tool	
AT-61	
IW	245
AY-96 / CY-96 / AHM-400 / AHB-400	
IU	245
MH	245A

Copper Side

Conductor Cu/CS (mm ²)	50
Dimensions (mm)	
Ø d3	10,3
B2	38,0
Application Tool	
AT-61	
IW	1
AY-96 / CY-96 / AHM-400 / AHB-400	
IU	25

MH

25

Dimension (mm) - L

103,5

Package

Qty. / Package

25

Unit Weight (g)

56,00