

**LB - BIMETALLIC COMPRESSION SLEEVE**

LB-120-95


**Description**

**Purpose:** Bimetallic splice, between aluminum-copper cable (reduced traction).

**Characteristics:** Compression connection. Its joint aluminum and copper construction prevents the formation of galvanic corrosion.

**Application:** Power distribution lines.

**Material:** Extruded aluminum and electrolytic copper. Supplied with antioxidant compound INTELTRON (aluminum side only).

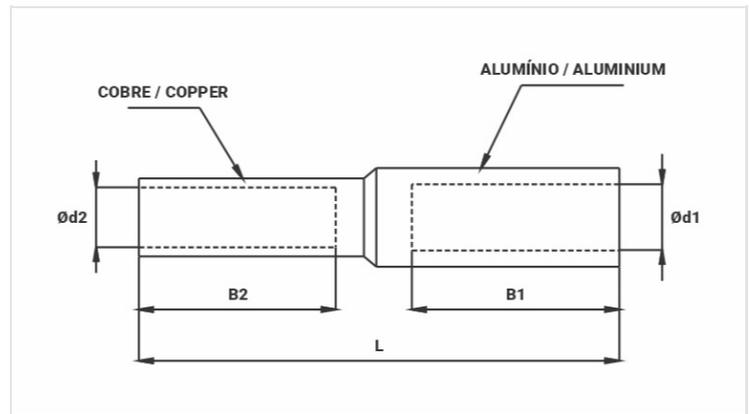

**Datasheet**

**Aluminum Side**

AAC Conductor (AWG / mm <sup>2</sup> Comp.)	4/0   120
Dimensions (mm)	
Ø d2	15,0
B2	51,5
Application Tool	
AT-61	
IW	249
AY-96 / CY-96 / AHM-400 / AHB-400	
IU	249
MH	249A

**Copper Side**

Conductor Cu/CS (mm <sup>2</sup> )	95
Dimensions (mm)	
Ø d3	13,8
B2	38,9
Application Tool	
AT-61	
IW	28
AY-96 / CY-96 / AHM-400 / AHB-400	
IU	27

MH

27

**Dimension (mm) - L**

98,4

**Package**

Qty. / Package

15

Unit Weight (g)

90,10