LB - BIMETALLIC COMPRESSION SLEEVE

LB-120-95

Description


Purpose: Bimetallic splice, between aluminum-copper cable (reduced traction).

Characteristics: Compression connection. Its joint aluminum and copper construction prevents the formation of galvanic corrosion.

Application: Power distribution lines.

Material: Extruded aluminum and electrolytic copper. Supplied with antioxide compound INTELTROX (aluminum side only).



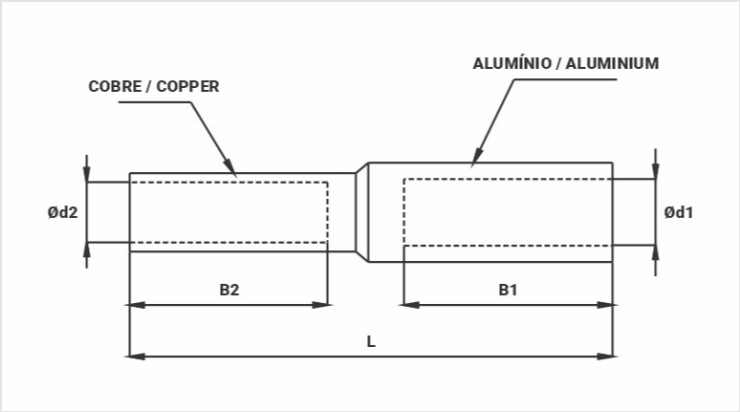

Datasheet

Aluminum Side	
AAC Conductor (AWG / mm² Comp.)	4/0 | 120
Dimensions (mm)	
Ø d2	15,0
B2	51,5
Application Tool	
AT-61	
IW	249
AY-96 / CY-96 / AHM-400 / AHB-400	
IU	249
MH	249A
Copper Side	
Conductor Cu/CS (mm²)	95
Dimensions (mm)	
Ø d3	13,8
B2	38,9
Application Tool	
AT-61	
IW	28
AY-96 / CY-96 / AHM-400 / AHB-400	
IU	27

MH	27
Dimension (mm) - L	98,4
Package	
Qty. / Package	15
Unit Weight (g)	90,10