LAR - SPLICE SLEEVE FOR ALUMINUM CABLE (FULL TRACTION)

LAR-49

Description


Purpose: Aluminum cable splice (bare or insulated network), full traction.

Characteristics: Compression connection. High electrical conductivity and resistance to corrosion. Supplied with centering guide.

Application: Power distribution lines.

Material: Extruded aluminum. Supplied with antioxide compoundINTELTROX.



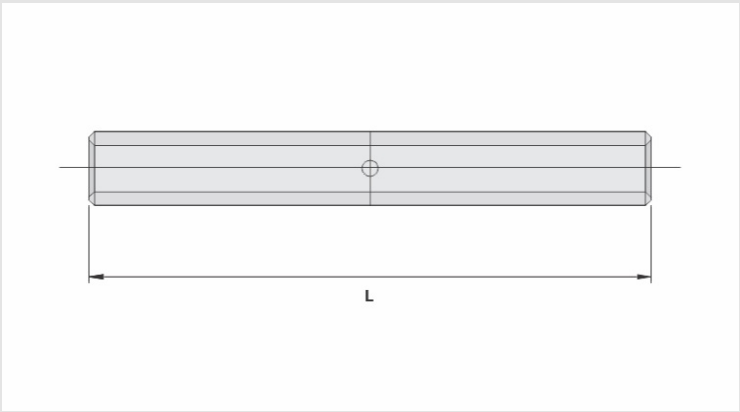

Datasheet

Conductors	
AAC (AWG/MCM)	2/0
Compact (mm²)	70
Dimension (mm) - L	235,0
Application Tool	
Mechanical Pliers (AT-60 4t)	
Die	IW-245
Compressions	16
Hydraulic Pliers (AY/CY/AHM/AHB)	
Die	IU-245
Compressions	8
Package	
Qty. / Package	50
Unit Weight (g)	99,00