

**TP - RING TYPE PRE-INSULATED TERMINALS**

TP-1,5-6

**Description**

**Purpose:** Termination of rigid or flexible copper cables.


**Characteristics:** Compression connection. High electrical conductivity and corrosion resistance.

**Application:** Electrical installations in general (residential, building, industrial). Circuits up to 70°C and 750V.

**Material:** Electrolytic copper and insulation in rigid PVC.

**Finish:** Tin plated and insulated.

**Application Tool:** AT-10 or ATC-6.

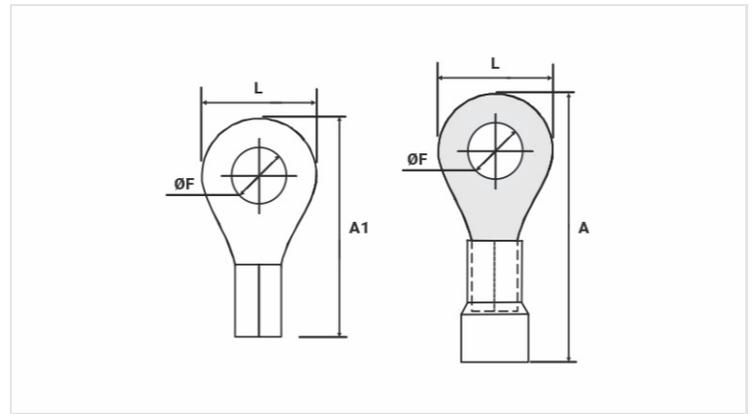

**Datasheet**

<b>Insulation per DIN Standard (Color)</b>	VERMELHO
<b>Conductor</b>	
AWG/MCM	22 - 16
mm <sup>2</sup>	0,5 - 1,5
<b>Dimensions (mm)</b>	
L	12,0
A	27,0
ØF	6,5
A1	21,5
<b>Maximum Current (A)</b>	19
<b>Package</b>	
Qty. / Package	100
Unit Weight (g)	1,18