

## **TPT - TUBULAR RING TYPE PRE-INSULATED TERMINALS**

TPT-10-5

## **Description**


**Purpose:** Termination of rigid or flexible copper cables.

**Characteristics:** Compression connection. High electrical conductivity and corrosion resistance.

**Application:** Electrical installations in general (residential, building, industrial). Circuits up to 90°C and 750V.

**Material:** Electrolytic copper and polypropylene insulation. **Finish:** Tin plated and insulated. Application Tool: ATP-49.



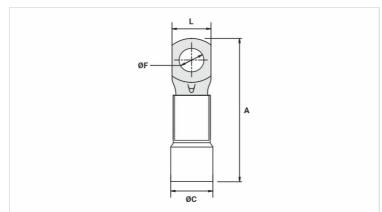

## **Datasheet**

Insulation per DIN Standard (Color)	VERMELHO
Conductors - Cross Section (mm²)	10
Dimensions (mm)	
L	8,6
A	32,0
C	6,0
ØF	5,2
Maximum Current (A)	81
Package	
Qty. / Package	100
Unit Weight (g)	2,62