

TPT - TUBULAR RING TYPE PRE-INSULATED TERMINALS

TPT-16-5

Description


Purpose: Termination of rigid or flexible copper cables.

Characteristics: Compression connection. High electrical conductivity and corrosion resistance.

Application: Electrical installations in general (residential, building, industrial). Circuits up to 90°C and 750V.

Material: Electrolytic copper and polypropylene insulation.

Finish: Tin plated and insulated. Application Tool: ATP-49.

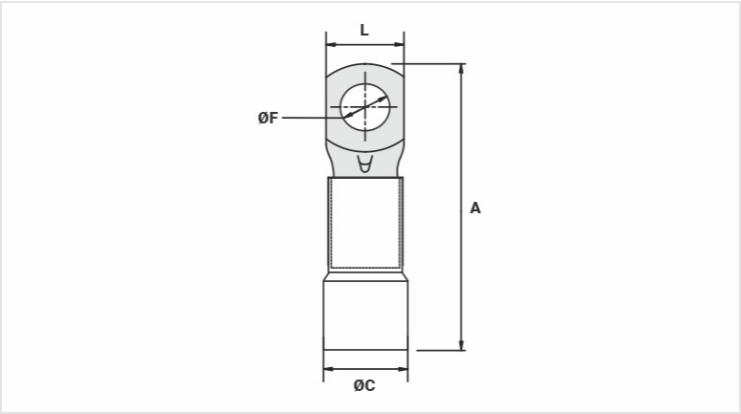

Datasheet

Insulation per DIN Standard (Color)	AZUL
Conductors - Cross Section (mm ²)	16
Dimensions (mm)	
L	11,3
A	38,0
C	7,9
ØF	5,2
Maximum Current (A)	110
Package	
Qty. / Package	100
Unit Weight (g)	5,60