

TPT - TUBULAR RING TYPE PRE-INSULATED TERMINALS

TPT-16-6

Description


Purpose: Termination of rigid or flexible copper cables.

Characteristics: Compression connection. High electrical conductivity and corrosion resistance.

Application: Electrical installations in general (residential, building, industrial). Circuits up to 90°C and 750V.

Material: Electrolytic copper and polypropylene insulation. **Finish:** Tin plated and insulated. Application Tool: ATP-49.



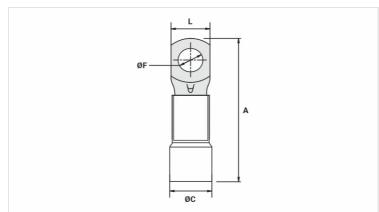

Datasheet

| Insulation per DIN Standard (Color) | AZUL |
|-------------------------------------|------|
| Conductors - Cross Section (mm²) | 16 |
| Dimensions (mm) | |
| L | 11,3 |
| A | 38,0 |
| C | 7,9 |
| ØF | 6,5 |
| Maximum Current (A) | 110 |
| Package | |
| Qty. / Package | 100 |
| Unit Weight (g) | 5,38 |
| | |