

## **TPT - TUBULAR RING TYPE PRE-INSULATED TERMINALS**

TPT-25-8

## **Description**


**Purpose:** Termination of rigid or flexible copper cables.

**Characteristics:** Compression connection. High electrical conductivity and corrosion resistance.

**Application:** Electrical installations in general (residential, building, industrial). Circuits up to 90°C and 750V.

**Material:** Electrolytic copper and polypropylene insulation. **Finish:** Tin plated and insulated. Application Tool: ATP-49.



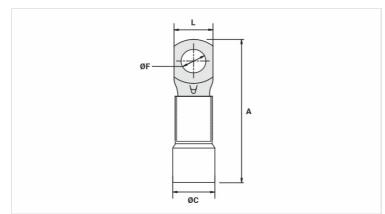

## **Datasheet**

Insulation per DIN Standard (Color)	AMARELO
Conductors - Cross Section (mm²)	25
Dimensions (mm)	
L	12,9
A	42,5
C	9,0
ØF	8,5
Maximum Current (A)	146
Package	
Qty. / Package	100
Unit Weight (g)	7,90