


TPT - TUBULAR RING TYPE PRE-INSULATED TERMINALS

TPT-25-10

Description

- Purpose:** Termination of rigid or flexible copper cables.
- Characteristics:** Compression connection. High electrical conductivity and corrosion resistance.
- Application:** Electrical installations in general (residential, building, industrial). Circuits up to 90°C and 750V.
- Material:** Electrolytic copper and polypropylene insulation.
- Finish:** Tin plated and insulated. Application Tool: ATP-49.

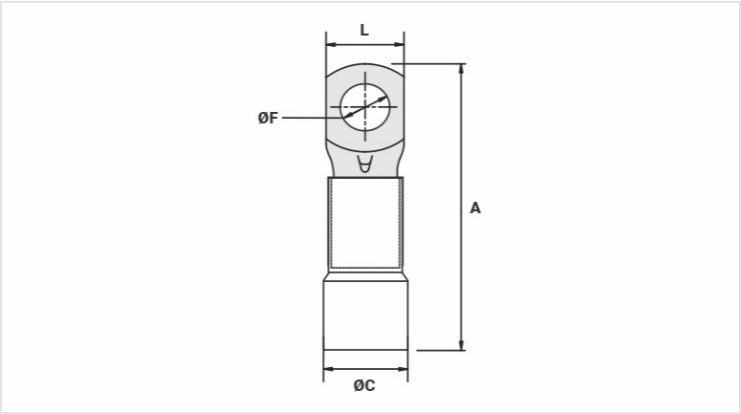

Datasheet

Insulation per DIN Standard (Color)	AMARELO
Conductors - Cross Section (mm²)	25
Dimensions (mm)	
L	15,5
A	46,5
C	9,0
ØF	10,5
Maximum Current (A)	146
Package	
Qty. / Package	100
Unit Weight (g)	8,60