


TPP - PIN TYPE PRE-INSULATED TERMINALS

TPP-1,5-8

Description

- Purpose:** Termination of rigid or flexible copper cables.
- Characteristics:** Compression connection. High electrical conductivity and corrosion resistance.
- Application:** Electrical installations in general (residential, building, industrial). Circuits up to 70°C and 750V.
- Material:** Electrolytic copper and insulation in rigid PVC.
- Finish:** Tin plated and insulated.
- Application Tool:** AT-10 or ATC-6.

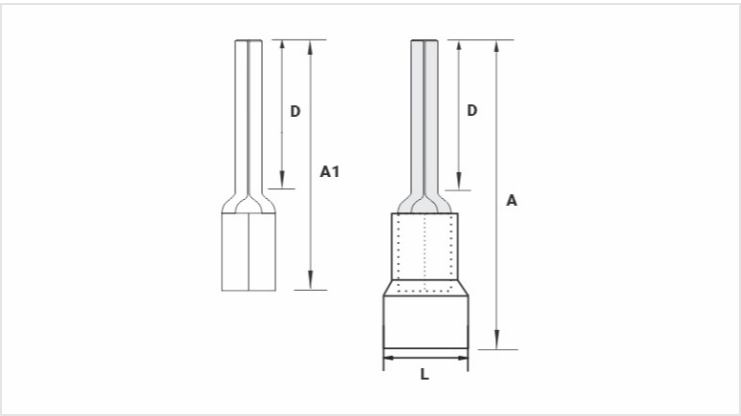

Datasheet

Insulation per DIN Standard (Color)		VERMELHO / RED / ROJO
Conductor		
AWG/MCM		22 - 16
mm²		0,5 - 1,5
Dimensions (mm)		
L		5,7
A		20,0
D		8,0
A1		14,0
Maximum Current (A)		19
Package		
Qty. / Package		100
Unit Weight (g)		0,60