
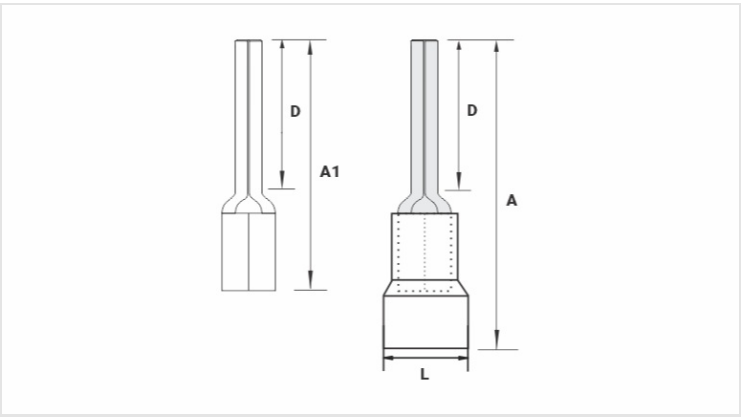


TPP - TUBULAR PIN TYPE PRE-INSULATED TERMINALS

TPP-10-15

Description

- Purpose:** Termination of rigid or flexible copper cables.
- Characteristics:** Compression connection. High electrical conductivity and corrosion resistance.
- Application:** Electrical installations in general (residential, building, industrial). Circuits up to 90°C and 750V.
- Material:** Electrolytic copper and polypropylene insulation.
- Finish:** Tin plated and insulated.
- Application Tool:** ATP-49.

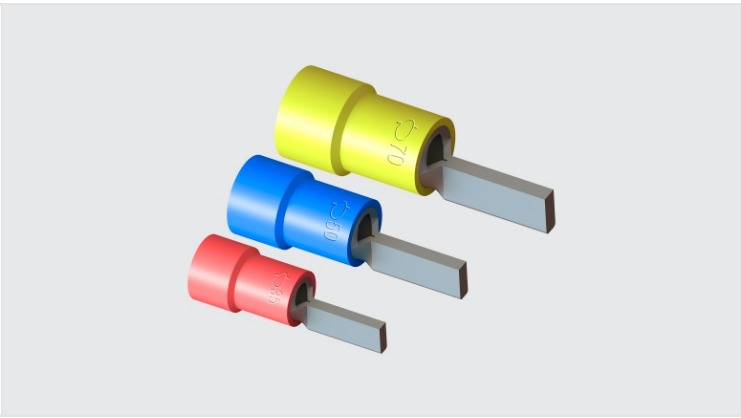

Datasheet

Insulation per DIN Standard (Color)	VERMELHO
Conductors - Cross Section (mm <sup>2</sup> )	10
Dimensions (mm)	
L	
A	35,0
C	
D	15,0
A1	27,0
Maximum Current (A)	101
Package	
Qtd / Emb	100
Peso Unit. (g)	2,40