LEP - PRE-INSULATED SPLICE SLEEVE

LEP-6

Description

Purpose: Splice (reduced traction) of rigid or flexible copper cable.

Characteristics: Compression connection. High electrical conductivity and corrosion resistance.


Application: Electrical installations in general (residential, building, industrial). Circuits up to 70ºC and 750V.

Material: Electrolytic copper and insulation in rigid PVC.

Finish: Tin plated and insulated.

Application Tool: AT-10 or ATC-6.



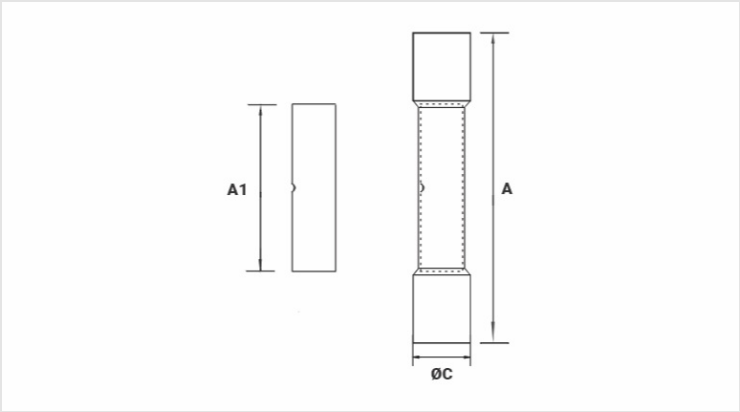

Datasheet

Insulation per DIN Standard (Color)	AMARELO / YELLOW / AMARILLO
Conductor	
AWG/MCM	12 - 10
mm²	4 - 6
Dimensions (mm)	
L	7,2
A	27,0
A1	15,0
Maximum Current (A)	48
Package	
Qty. / Package	100
Unit Weight (g)	1,5