DATASHEET

TPF - FORK TYPE PRE-INSULATED TERMINALS

TPF-6-3

Description

Purpose: Termination of rigid or flexible copper cables.


Characteristics: Compression connection. High electrical conductivity and corrosion resistance.

Application: Electrical installations in general (residential, building, industrial). Circuits up to 90°C and 750V. **Material:** Electrolytic copper and polypropylene insulation.

GRUPO

Finish: Tin plated and insulated.

Application Tool: AT-10 or ATC-6.

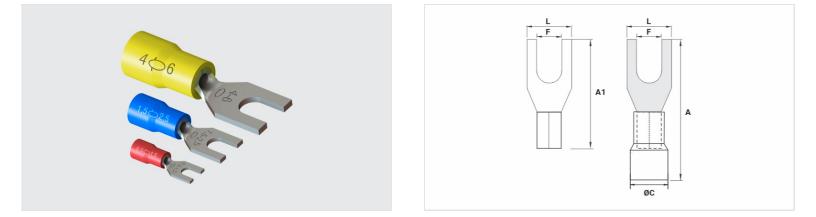

Datasheet

Insulation per DIN Standard (Color)	AMARELO / YELLOW / AMARILLO
Conductor	
AWG/MCM	12 - 10
mm ²	4 - 6
Dimensions (mm)	
L	7,5
A	26,0
ØC	7,6
F	3,3
Al	20,0
Maximum Current (A)	48
Package	
Qty. / Package	100
Unit Weight (g)	1,63