TPF - FORK TYPE PRE-INSULATED TERMINALS

TPF-6-3

Description

Purpose: Termination of rigid or flexible copper cables.

Characteristics: Compression connection. High electrical conductivity and corrosion resistance.

Application: Electrical installations in general (residential, building, industrial). Circuits up to 90ºC and 750V.

Material: Electrolytic copper and polypropylene insulation.

Finish: Tin plated and insulated.

Application Tool: AT-10 or ATC-6.

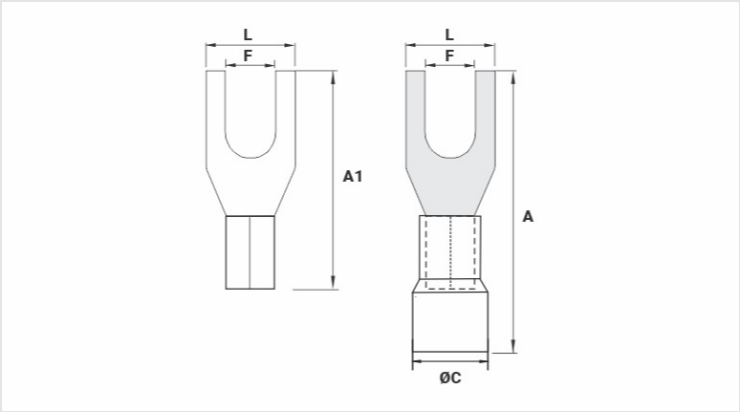

Datasheet

Insulation per DIN Standard (Color)	AMARELO
Conductor	
AWG/MCM	12 - 10
mm²	4 - 6
Dimensions (mm)	
L	7,5
A	26,0
C	
F	3,3
A1	20,0
Maximum Current (A)	48
Package	
Qtd / Emb	100
Peso Unit. (g)	1,63