

TPF - FORK TYPE PRE-INSULATED TERMINALS

TPF-6-4

Description

Purpose: Termination of rigid or flexible copper cables.


Characteristics: Compression connection. High electrical conductivity and corrosion resistance.

Application: Electrical installations in general (residential, building, industrial). Circuits up to 90°C and 750V.

Material: Electrolytic copper and polypropylene insulation.

Finish: Tin plated and insulated. **Application Tool:** AT-10 or ATC-6.



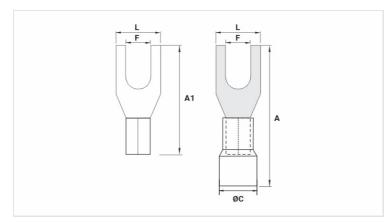

Datasheet

| Insulation per DIN Standard (Color) | AMARELO / YELLOW / AMARILLO |
|-------------------------------------|-----------------------------|
| Conductor | |
| AWG/MCM | 12 - 10 |
| mm ² | 4 - 6 |
| Dimensions (mm) | |
| L | 7,5 |
| A | 26,0 |
| Ø C | 7,6 |
| F | 4,3 |
| A1 | 20,0 |
| Maximum Current (A) | 48 |
| Package | |
| Qty. / Package | 100 |
| Unit Weight (g) | 1,58 |