

TPF - FORK TYPE PRE-INSULATED TERMINALS

TPF-6-5

Description

Purpose: Termination of rigid or flexible copper cables.


Characteristics: Compression connection. High electrical conductivity and corrosion resistance.

Application: Electrical installations in general (residential, building, industrial). Circuits up to 90°C and 750V.

Material: Electrolytic copper and polypropylene insulation.

Finish: Tin plated and insulated. **Application Tool:** AT-10 or ATC-6.



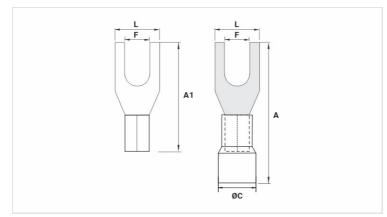

Datasheet

Insulation per DIN Standard (Color)	AMARELO / YELLOW / AMARILLO
Conductor	
AWG/MCM	12 - 10
mm²	4 - 6
Dimensions (mm)	
L	8,0
A	26,0
Ø C	7,6
F	5,2
A1	20,0
Maximum Current (A)	48
Package	
Qty. / Package	100
Unit Weight (g)	1,58