
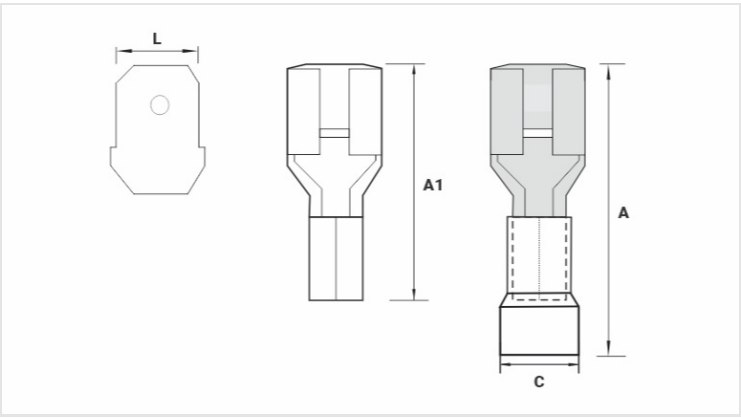


MA/FE - MALE/FEMALE QUICK DISCONNECT TYPE PRE-INSULATED TERMINALS

FE-1,5-6

Description

- Purpose:** Connection / disconnection of rigid or flexible copper cables.
- Characteristics:** Compression connection. High electrical conductivity and corrosion resistance.
- Application:** Electrical installations in general (residential, building, industrial).Circuits up to 70°C and 750V.
- Material:** Electrolytic copper and polypropylene insulation.
- Finish:** Tin plated and insulated.
- Application Tool:** AT-10 or ATC-6.

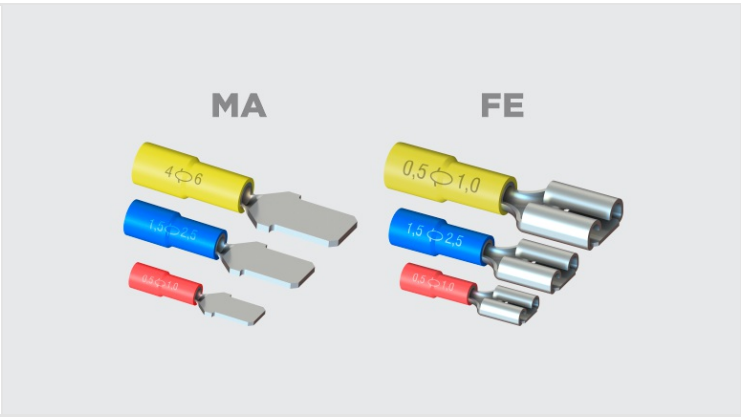

Datasheet

Insulation per DIN Standard (Color)		VERMELHO
Conductor		
AWG/MCM		22 - 18
mm²		0,5 - 1,0
Dimensions (mm)		
L		6,4
A		24,0
C		
E		0,8
A1		18,0
Package		
Qtd / Emb		100
Peso Unit. (g)		1,0